



## Automotive Aftermarket Division

### 3M™ 05888 Instant Plastic Repair Patch

### 3M™ 06396 Patch Adhesion Promoter (Wipes)

---

#### 1) Part Numbers

05888 Box of 3 Patches with 6 sachets of  
06396 (Part of 05888 or separately to be obtained in packs of 25)

#### 2) Description and end uses'

3M™ Instant Plastic Repair Patch is a 200mm x 100mm thermoplastic patch, backing laminated with 3M™ high performance acrylic foam tape.

3M™ Instant Plastic Repair Patch is used to easily repair damaged plastic parts, whereas the repair requires backside reinforcement (i.e. holes or cracks).

Used in conjunction with 06396 Patch Adhesion Promoter, it offers an immediate adhesion on most plastics, allowing a fast and easy reinforcement of the back of the repair. The repair of the front can follow directly without wait, using the 3M™ plastic repair materials.

3M™ Instant Plastic Repair Patch is complementary to the range of 3M™ plastic repair materials and fillers.

#### 3) Physical Properties

##### 3M™ 05888 Instant Plastic Repair Patch

Base	TPO plastic backing laminated on high performance acrylic foam tape
Consistency	Flexible plastic
Color	Black
Solids content (typical)	100 %
Temperature resistance	-10°C to +85°C
Temperature of application	+15°C to +35°C
Storage conditions	+5°C to +35°C.
Shelf life	No shelf life



## 3M™ 06396 Patch Adhesion Promoter

Base	Wet wipe, promoter itself is a colourless liquid, solvent based
Temperature of application	+15°C to +35°C
Storage conditions	+5°C to +35°C.
Shelf life	36 months from date of manufacture (see sachet)

- Ready to use repair system: easy application, no product mixing and spreading.
- High Performance acrylic foam tape: immediate and durable adhesion on most plastics when used in conjunction with 3M™ 06396 Patch Adhesion Promoter.
- Strong and flexible TPO plastic backing: easy to apply even on curved shapes and in corners. Can be heated to help shaping.
- No cure time after application: saves time in the repair process, 3M™ plastic repair material or filler can be applied on the front side of the repair immediately after patch application.
- Thin patch with black surface: produces a clean and nice appearance of the repair. Will not interfere with other parts of the repair area.

### 4) Directions for Use

This procedure is for repair of tears, cracks, holes and all other damages requiring front and backside reinforced repairs on automotive plastic parts like bumpers. Following example is for a crack repair.

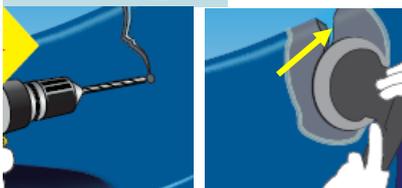


#### 1. Clean part

- Remove part from the vehicle.
- Clean front (A) and backside (B) with high pressure washer or water and soap.
- Allow to dry.


#### 2. Prepare repair area

- Drill a 4 to 6 mm hole at the end of the crack to release stress and prevent from further crack extension.
- If crack reach the edge of the part, grind a V-notch at the edge of the crack (see arrow) to avoid crack propagation later in the process.
- Sand front side (P80 - P180) to remove all paint around the repair area.

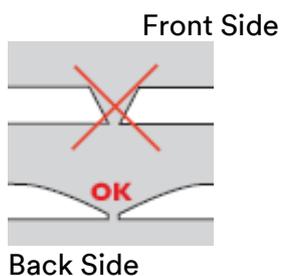

### 3. Prepare crack area


- Dish out the front side of the crack area to maximize bonding surface and achieve optimum repair resistance.
- Avoid heating and melting the plastic during sanding. Remove traces of melted plastic with a knife or thinner sanding.
- Avoid making sharp edges (see drawing) that may cause the repair to remain visible after painting.
- Blow off the repair area using clean, non-oiled compressed air.

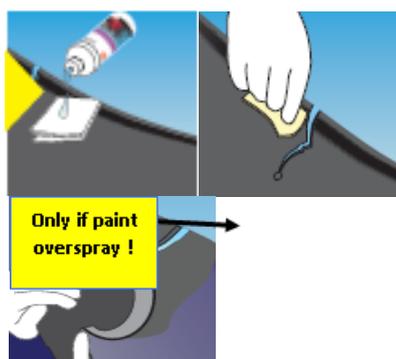

### 4. Inside preparation – Adhesion promoter application

- Clean both side with 3M™ 22779 VHB™ Surface Cleaner or 3M™ 08984 cleaner.
- Wipe the repair area on the back of the part where the patch will be placed with 3M™ 06396 Patch Adhesion Promoter.
- Allow to dry for 5 minutes.

Caution: in case there is some paint overspray in the back side, it is critical to remove it (P320 sanding or clean with Scotch-Brite™ + 08984) before applying the adhesion promoter and the patch. Not removing paint overspray creates a weak link that may reduce patch adhesion.

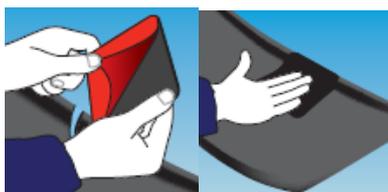


### 5. Patch Application

- Cut patch to size with scissors or a knife keeping 2 to 3cm around the crack or the hole.
- Remove the red liner.
- Apply to the repair area. Press firmly to get immediate adhesion.
- Excess of Patch on the edge can be cut with a knife.

Back side repair is completed.

### 6. Front side repair

- Finalize the repair on the front side as per the usual methods with 3M™ plastic repair material.
- For edge finishing, 3M™ 05888 Patch can be sanded when sanding the filler to achieve perfect appearance.
- Prime and paint as per your paint supplier recommendations.

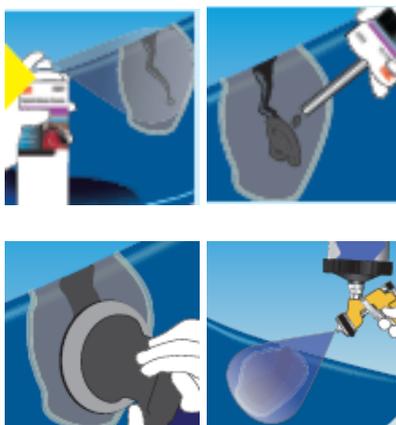



# Technical Data Sheet

Effective: 28/02/2020 Supersedes: 01/11/2005

## 5) Storage

Store in its original box between 5 C – 35 C in a dry area.

The patch has no shelf life, the adhesion promoter has a shelf life of 36 months after manufacture in the original sealed sachet.

## 6) Safety

Read full instructions and material safety data sheet before use.

**IMPORTANT:** This product (06396) contains hazardous materials and therefore appropriate personal protective equipment should always be used. Please refer to the label and consult the material safety data sheet for full handling instructions and personal protection information. These are available via your stockist. The supplier disclaims any liability where the user does not wear the recommended personal protective equipment.

3M™ 05888 Instant Plastic Repair Patch and 3M 06396 Patch Adhesion Promoter (Wipes) are designed FOR PROFESSIONAL INDUSTRIAL USE ONLY.

## 7) Disclaimer

All statements, technical information and recommendations are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. Please ensure before using our product that it is suitable for your intended use. All questions of reliability relating to this product are governed by the Terms of Sale subject, where applicable, to the prevailing law.



# Technical Data Sheet

Effective: 28/02/2020 Supersedes: 01/11/2005

## For Additional Health and Safety Information

3M South Africa & Sub-Saharan Africa, 146A Kelvin Drive, Woodmead, Sandton, South Africa, Tel: (0861) 225536
3M (East) AG Representation Office Tirane, Rruga Sami Frasheri, Pallati i Ri Perxhola Kati 2 Ap2, 1000 Albania
3M Arabia, LLC, Building 24-25 3M Saudi Arabia Zone C, Business Gate, Airport Road, Riyadh, Saudi Arabia
3M Bulgaria, Mladost 4, Business Park, bl.4, 2nd floor, Sofia 1766, Bulgaria
3M Česko, spol. s r.o., V Parku 2343/24, 148 00 - Praha 4, Czech Republic
3M (East) AG, Branch office Croatia, Avenija Većeslava Holjevca 40, 10 000 Zagreb, Croatia, Tel: +385 1 2499750, www.3m.com.hr
3M Egypt, Finance Center , New Cairo , Plot 140 , Banking Sector , 5th settlement , Cairo , Egypt
3M Hellas MEPE, Automotive Aftermarket Division, 20 Kifisias Avenue, 151 25 Marousi, Greece, Phone: +30 210 68 85 300, innovation.gr@mmm.com, www.3M.gr
3M Hungária Kft, Neumann János u. 1/E, 1117 Budapest, Hungary
3M Israel, 91 Medinat Hayehudim St., Herzliya, Israel
3M Kenya Ltd, Victoria Towers, 3rd Floor, Kilimanjaro Av, Upperhill, Kenya
3M Gulf Limited, Ein El Mreisseh, Saint Charles City Center, 4th. Floor, P.O.Box: 11-5025, Riad el Solh, Beirut 1107 2180 Lebanon
3M Minnesota Mining & Manufacturing Nigeria Limited, No 2 Sheraton Opebi Link Road, Ikeja, Lagos Nigeria
3M Pakistan, Islamic Chamber of Commerce Building, ST-2/A, Block 9, KDA Scheme 5, Clifton, Karachi, Pakistan
3M Poland, Al. Katowicka 117, Kajetany, 05-830 Nadarzyn, Poland, Telefon: +48 22 739 60 00, www.3m.pl/kontakt
3M Gulf (Representation Office), Suhaim Bin Hamad St., Al Mana Towers Tower B, 2nd Floor, Office No.4, Doha Qatar, P.O.Box 14685
3M Romania, 12 Menuetului St., Bucharest Business Park, Building D, District 1 013713 Bucharest, Romania
3M (East) AG, Representation Office Serbia, Airport City, Omladinskih brigada 90B, 11070 Belgrade, Serbia, Tel: +381 11 2209 400, www.3m.co.rs/3M/sr_RS/3m-south-east-europe/
3M Slovensko s.r.o., Polus Tower 2, Vajnorská 100/B, 83104 Bratislava
3M (East) AG, Branch office Slovenia, Cesta v Gorice 8, 1000, Ljubljana, Slovenia, Tel: +386 1 2003 630, www.3m.com/3M/sl_SI/3m-south-east-europe/
3M Sanayi ve Ticaret As, Barbaros Mah., Mor Sümbül Sok., No:7/3F, 27-51, Nidakule Ataşehir Güney, 34746 Ataşehir, İstanbul, Turkey
3M Gulf Limited, Dubai Internet City, Building No. 11, 3rd Floor, U.A.E

© 3M 2019. 3M, Scotch-Brite and VHB are trademarks of the 3M company. All rights reserved