

## TECHNICAL DATA SHEET

### 1K WASH PRIMER

- Article number:** **26022**
- Intended use:** Car refinishing Product/ Lacquer
- General characteristics:** 1K Wash Primer has excellent adhesive properties, especially on polished metal, e.g. steel plate. Active rust protection pigments ensure optimum corrosion protection. Quick drying. Can also be used as a welding primer.  
For best possible preparation of metal substrates, use Silicone Remover for thorough precleaning. 2K Primer is our recommendation for an ideal secondary product.
- Application areas:** Ideal for spot and part painting
- Quality and properties:**
- 1K acid primer, welder primer
  - Can be used for spot repairs and refinishing parts
  - Simple, time-saving application
  - Fast drying time
  - Excellent corrosion protection
  - Very good adhesion, especially on bare sanded metal
- Physical and chemical characteristics:**
- **Basis of binder:** NC
  - **Colour:** red brown
  - **Smell:** solvent
  - **Efficiency:** 1 m<sup>2</sup>
  - **Substrate:** sanded: blank metall, cured paintings, primer for refinishing parts, polyester substrates, aluminium. Galvanised sheet metals with 3- layer structure
  - **Temperature resistance:** to 90 °C
  - **Storage stability:** 10 years if appropriate storage provided (=10°-25°C, relative air humidity of max. 60%)
  - **Size:** Aerosol cans, maximum nominal volume 400 ml
  - **VOC value:** 270,5g

## Environment and labelling:

**Environmentally sound:** 1K Wash primer is 100% free of heavy metals. The caps and packagings are made of recyclable material.

**Disposal:** Only the completely emptied cans should be put into the recycling skip or appropriate container for reclaimable refuse. Cans which are not empty should be disposed off as "special refuse".


**Marking/Labelling:** All products comply with the actual labelling regulations according to Preparation Guideline 1999/45/EG. All aerosols correspond to TRGS 200 and TRG 300 as well as to aerosol guideline 75/324/EWG in the actually valid version.

## Using instructions:

Before use, carefully read and observe the warning texts on the label!

### Application

- 1-2 coats, when used as a primer
- Air for 10-50 minutes (20 ° C), then recoat with 1K fillers or 2K hi-speed primer
- One light coat when used as a welding primer
- Remove all rust damaged area, clean surface thoroughly and sand.
- Area must be dry and free of grease and dust
- Clean undercoat with silicone remover
- Shake the can well for 2 minutes
- Carry out test spray
- For professional use only
- Wear an appropriate respirator (recommended type A2/P3)

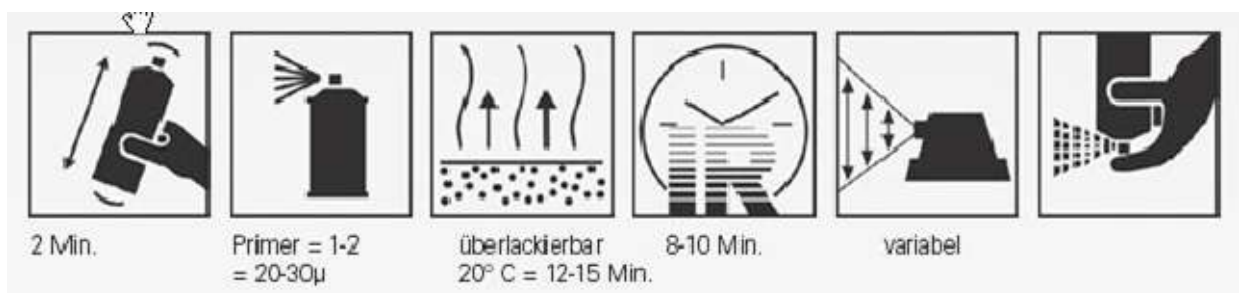

This release replaces all eventually earlier issued versions.

For additional information, not contained in this Technical Data Sheet, please contact the supplier via:  
[info@chamaeleon-produktion.de](mailto:info@chamaeleon-produktion.de)

For safety information, please refer to the corresponding Safety Data Sheet.